

REMS Frigo 2

Electric pipe freezing unit

Easy, fast freezing of pipes which are not drained. Closed refrigerant circuit. Environmentally safe. CFC-free. For maintenance, repair and extension of piping systems.

Steel, copper, plastic, composite pipes Ø 1/8–2"
Ø 10–60 mm

Refrigerant: R-404A.

REMS Frigo 2 – electrically freezing instead of draining. Super fast up to 2". High cooling capacity, e.g. 3/4" steel pipe in only 9 min*. Particularly compact, patented deep-freezer heads, for very fast assembly.

System advantage

Only one pipe freezing unit for the complete working range up to 2". One-size freezer heads for the core working range Ø 1/4–1" / Ø 15–35 mm, no reducing inserts required. Aid the cooling process simply by spraying with water. Always clean freezer heads, no pastes/greases required.

Closed refrigerant circuit

Electric pipe freezing unit with closed refrigerant circuit. Environmentally safe. Can be used anywhere, also in closed rooms. Refrigerant R-404A. High cooling capacity. Ideal also for longer repairs.

Execution

Robust, compact. Very small deep-freezer heads fitted parallel to the pipe leaving refrigerant hoses for working in confined areas and niches also. Single or double freezing possible.

Cooling aggregate

Very quiet. Cooling aggregate, 430 W, in sturdy sheet metal housing with ventilating side openings for optimum air circulation. Large top compartment, easily accessible, for refrigerant hoses and accessories. Weighs only 23 kg. Easy to carry.

Deep-freezer heads


Very compact deep-freezer heads with special geometrically shaped cavities for seating different pipe diameters (**Patent EP 1 108 944, Patent US 6,434,952**). Very small, only 50 mm wide. All pipe sizes from Ø 1/4–1" resp. Ø 15–35 mm can be frozen with only one deep-freezer head. Deep-freezer inserts for the rest of the capacity up to 2", 60 mm. Tightening straps for simple and quick assembly of deep-freezer heads onto the pipe, without tools.

Refrigerant hoses

Flexible, extra-long refrigerant hoses in wear resistant, synthetic rubber for large work radius.

LCD-Digital-Thermometer

LCD-Digital-Thermometer for exact temperature display directly at the point of freezing as accessory.

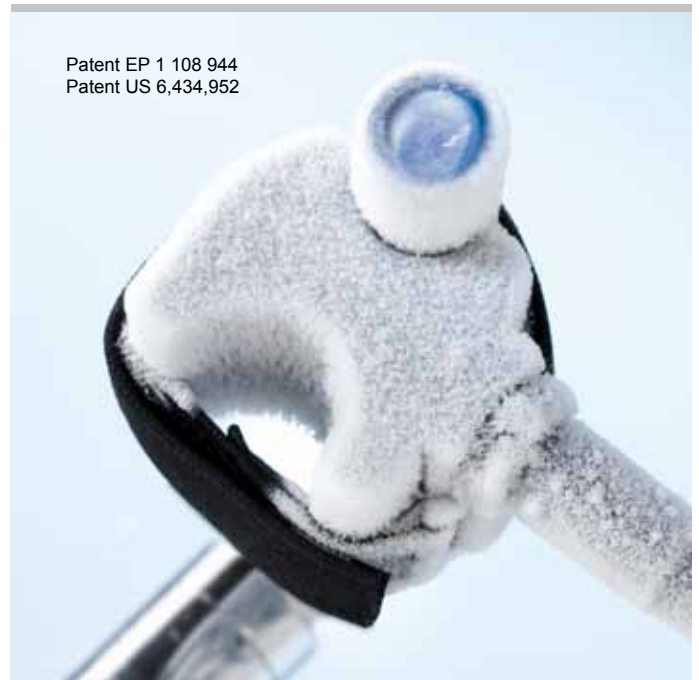

Patent EP 1 108 944
Patent US 6,434,952



Can be used anywhere, in confined areas also.

German Quality Product

Supply format

REMS Frigo 2. Electric pipe freezing unit with closed refrigerant circuit. For steel, copper, plastic, composite pipes, Ø 1/8–2", Ø 10–60 mm. Cooling aggregate 230 V or 110 V, 50 Hz, 430 W, 2 refrigerant hoses, 2 tightening straps, squirt bottle. Equipped for Ø 1/4–1 1/4", 15–42 mm. In sturdy sheet metal housing.

	Art.-No.
	131011

Accessories

Description	Size	Art.-No.	
Extension kit up to 2", 60 mm	1 1/2–2" / 54–60 mm	131160	
Deep-freeze inserts (pair)	1/8"	10, 12 mm	131110
	1 1/2"		131156
		54 mm	131157
		60 mm	131158
LCD-Digital-Thermometer		131115	



*ambient/water temperature approx. 18°C.



2011/02/07 11:55:56
360 450
7.2.0

REMS CamSys